


# Photometric Mapping: R-9835 Lighted Bollard

## PRODUCT SPECIFICATIONS:

Light Type	Lighting Colour (K)	Luminous Flux (lumens)	B. U. G. Rating
LED	3000	103	B1-U2-G0


## INTENSITY DISTRIBUTION DIAGRAM IN C PLANS

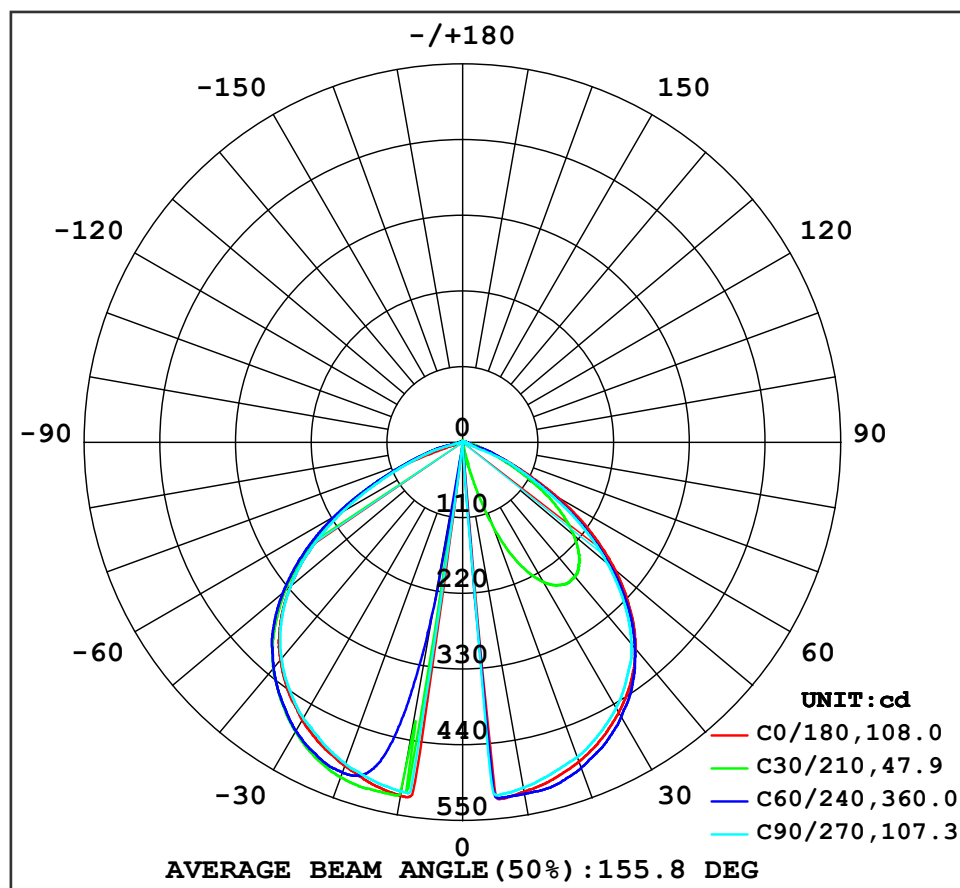

<p>C Range: 0 - 360DEG            C Interval: 10.0DEG            Test Speed: MEDIUM            Temperature: 25.3°C            Operators: DAMIN            Test Date: 2024-05-09</p>	<p>γ Range: 0 - 180DEG            γ Interval: 0.1DEG            Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.464            Humidity: 65.0%            Test Distance: 9.780m [K=1.0000]            Remarks:</p>
---	---

# Photometric Mapping: R-9835 Lighted Bollard

## ISO-ILLUMINANCE PLOT:

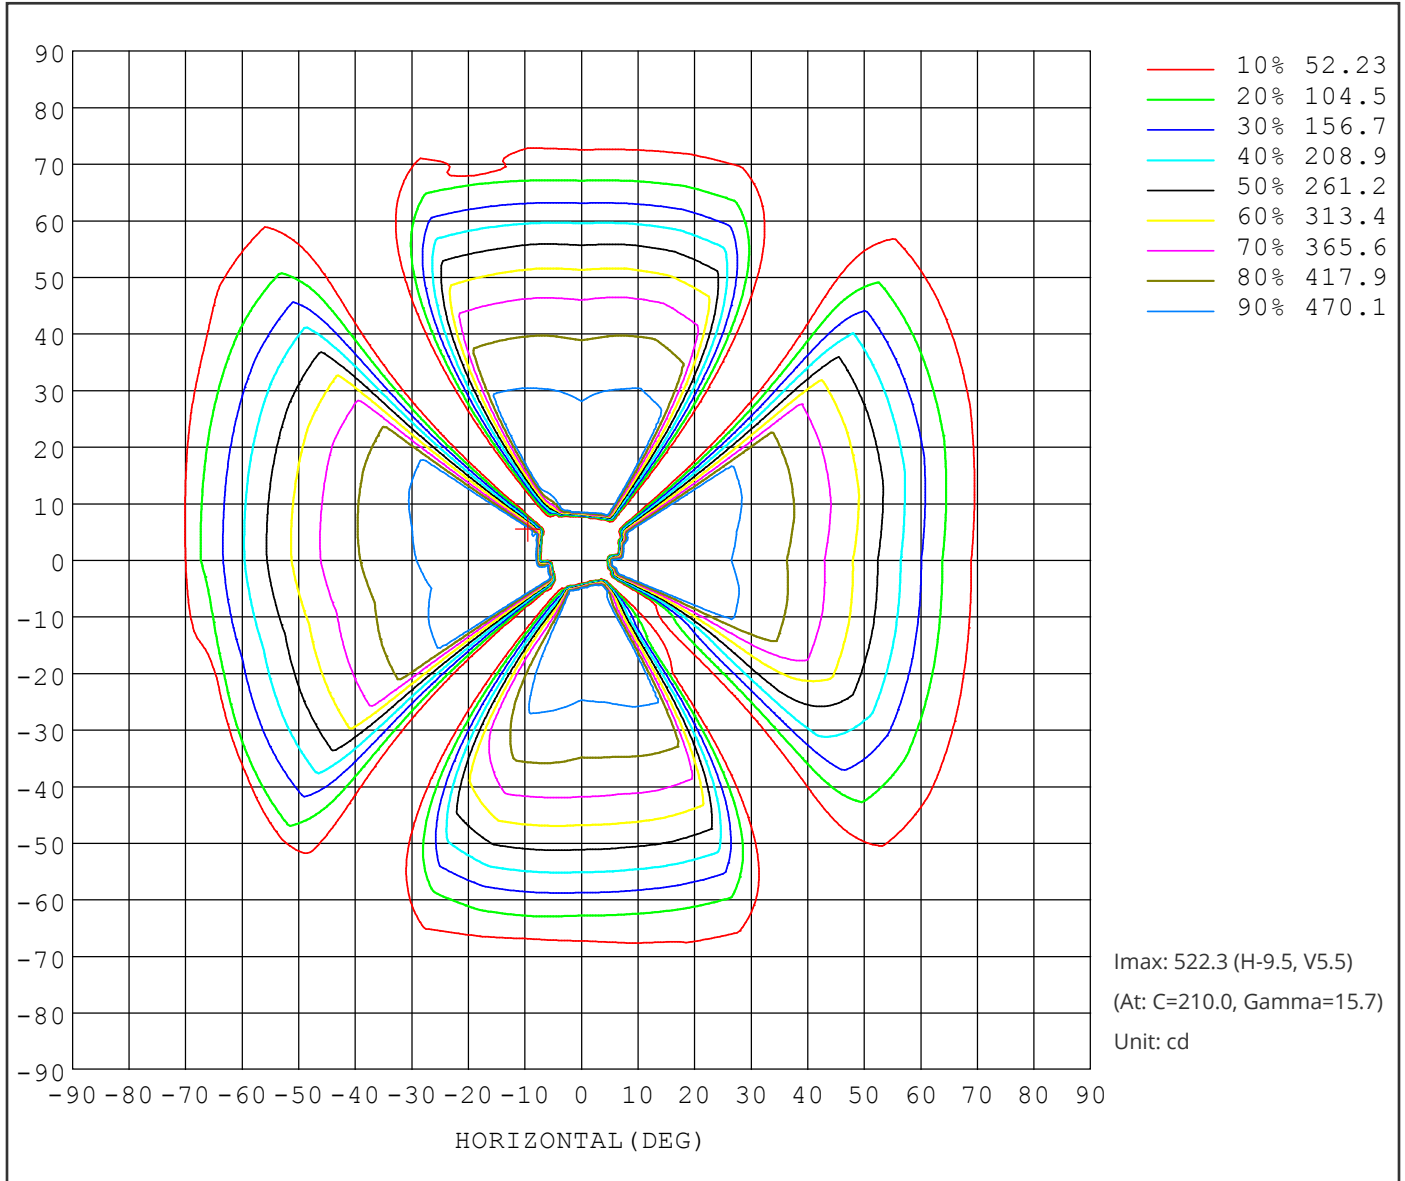

<b>C Range:</b> 0 - 360DEG <b>C Interval:</b> 10.0DEG <b>Test Speed:</b> MEDIUM <b>Temperature:</b> 25.3°C <b>Operators:</b> DAMIN <b>Test Date:</b> 2024-05-09	<b>γ Range:</b> 0 - 180DEG <b>γ Interval:</b> 0.1DEG <b>Test System:</b> EVERFINE GO-2000B_V1 SYSTEM V2.00.464 <b>Humidity:</b> 65.0% <b>Test Distance:</b> 9.780m [K=1.0000] <b>Remarks:</b>
--	--